

SAVE THESE INSTRUCTIONS



Please remember to respect the local regulations: hand in non-working electrical equipment to an appropriate waste disposal centre.

You can help protect the environment.

This guarantee does not confer any rights other than those expressly set out above.

This guarantee is not transferable and does not affect your statutory rights.

Liability is limited to replacement of the faulty product only no other costs will be reimbursed.

or repaired.

If the LED fails due to a manufacturing fault within this period it will either be replaced free of charge

or accidental damage.

The GUARANTEE DOES NOT APPLY in case of improper use, negligence, lack of maintenance

the date of purchase, under normal usage.

Material and workmanship for 12 months from This product is guaranteed against defects in

## GUARANTEE

## NEED HELP?

To ensure aquarium success visit our website for support, advice and helpful top tips on our products and fish keeping.

[www.fishkeeper.co.uk](http://www.fishkeeper.co.uk)



Scan the QR code with your smart phone or tablet to visit our website and learn more about fishkeeping and setting up your aquarium



Scan the QR code with your smart phone or tablet to visit and like our Facebook page



Consumer Advice contact details:

Interpet Ltd.

Consumer Advice Department,

Vincent Lane, Dorking, Surrey RH4 3YX

Email: [customercare@interpet.co.uk](mailto:customercare@interpet.co.uk)

[www.interpet.co.uk](http://www.interpet.co.uk)

## IMPORTANT SAFEGUARDS

- Disconnect the supply before conducting any maintenance.
- The cable or the flexible cord of the luminaire cannot be replaced. If the cable is damaged, the luminaire must be destroyed.
- This unit is for indoor use only – do not use outside.
- Do not use this unit if the cable or transformer plug are damaged or appear to be malfunctioning.
- Do not use this unit if the transformer plug gets wet.
- Dispose of responsibly following instructions from your local authority.



## QUICK START GUIDE


maidenhead  
aquatics  
[fishkeeper.co.uk](http://fishkeeper.co.uk)



## IMPORTANT SAFETY INSTRUCTIONS

# HOW TO INSTALL YOUR AQUATROPIC LED

1. The power supply transformer is not waterproof – this must be mounted such that it cannot fall into the aquarium or be splashed by water. The cable must be installed with a drip loop to prevent any water running down the cable into the plug socket.



## 2. Three options for fitting the Aquatropic LED

- a. **Hood location with adhesive pads** – Push fit the brackets onto the lighting unit – see illustration on pack, attach the double-sided adhesive pads to the flat surface of the brackets. Fix the Aquatropic LED to the underside of the hood in the desired location – ensure the hood surface is flat, clean and dry. **DO NOT** attach directly to fluorescent lamps or lamp reflectors.
- b. **Hood location with screws** - Ensure the hood material is thicker than the length of the screws to prevent them protruding through the outer surface. Fit the brackets onto the lighting system – see illustration on pack. Place the Aquatropic LED in the desired location under the hood and draw around the brackets with a pencil to indicate their position.


Remove the brackets from the Aquatropic LED and place them in the pencil marked position in the hood. Using the self-tapping screws provided fix the bracket in position using the fixing holes in the bracket. When both brackets are fixed in position push fit the Aquatropic LED into the bracket.

- c. **Hood location with glue** – (glue sold separately) push fit the brackets onto the Aquatropic LED – see illustration on pack.

Select desired location on the underside of the aquarium hood and mark the position of the brackets. Keep the hood away from the aquarium while gluing the brackets as the glue can be dangerous to the fish. Clean the marked area with a damp cloth then allow to dry, remove brackets from the LED unit and glue into the marked position on the aquarium hood.

An all-round plastic / wood glue is recommended for application, for example: 502 super adhesive glue. Always follow the glue manufacturer's instructions fully.

# RETRO FIT BRACKETS

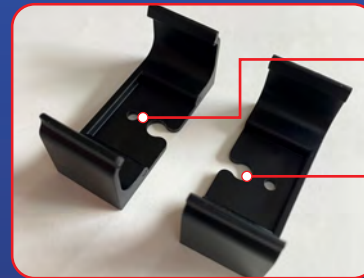

Retro fit screw position

Sucker button slot


# RECOMMENDED INSTALLATION




# SWITCH INSTRUCTIONS



ALL LEDS OFF  
(middle 0)



BLUE LEDS  
ON (I)



BLUE & WHITE  
LEDS ON (II)

SAVE THESE INSTRUCTIONS FOR FUTURE USE